

FLANŞLI TİP 2 PARÇALI KÜRESEL VANA

FLANGED TYPE 2 PIECE BALL VALVE



ÜRETİM STANDARTLARI / PRODUCTION STANDARDS

ÖLÇÜ / SIZE : DN15 → DN200

BASINÇ SINIFI / PRESSURE CLASS : PN16

NORM / NORM: DIN

DİZAYN / DESING : DIN 3357 - EN 12516-1

ALINDAN ALINA / FACE TO FACE : EN 558 (14-15)

TEPE FLANŞI / TOP FLANGE : ISO 5211

TEST / TEST : TS EN 12266-1

ÇALIŞMA SICAK. / WORKING TEMP: - 30 °C / +200 °C


UYGULAMALAR / APPLICATIONS

BUHAR, GAZ VE GENEL SIVILAR

VAPORS, GAS AND GENERAL LIQUIDS

En doğru tercih için vana seçim kılavuzunu incelemeniz önerilir.

Check out our valve selection guide for the best choice.

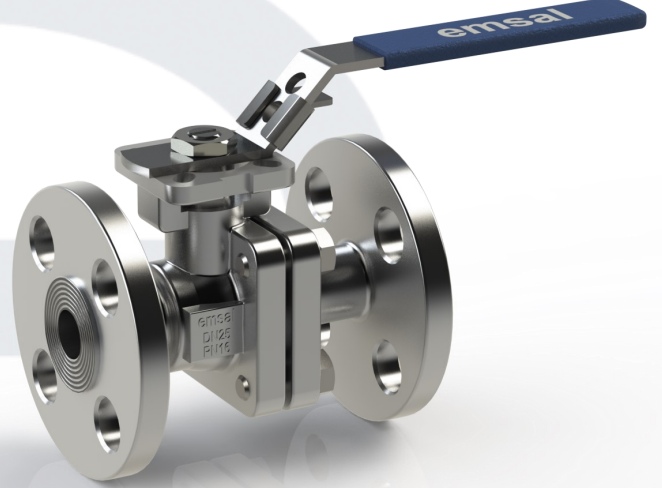


Ürün sayfası için taratın


Scan for product page

MATERYALLER / MATERIALS

GÖVDE / BODY

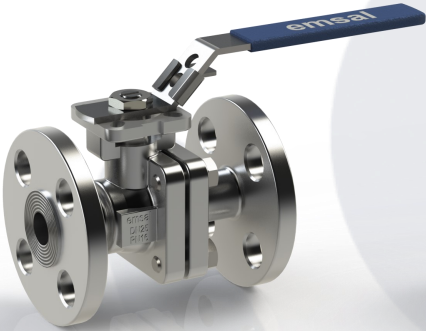

AISI316 / AISI304

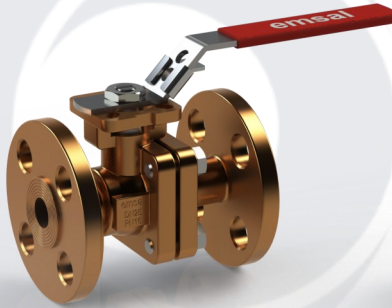

RG5 / G-CuSn10



GGG40.3

KÜRE / BALL



AISI316 / AISI304



RG5

CONTA / SEAT




P.T.F.E



P.T.F.E C25

FLANŞLI TİP 2 PARÇALI KÜRESEL VANA

FLANGED TYPE 2 PIECE BALL VALVE

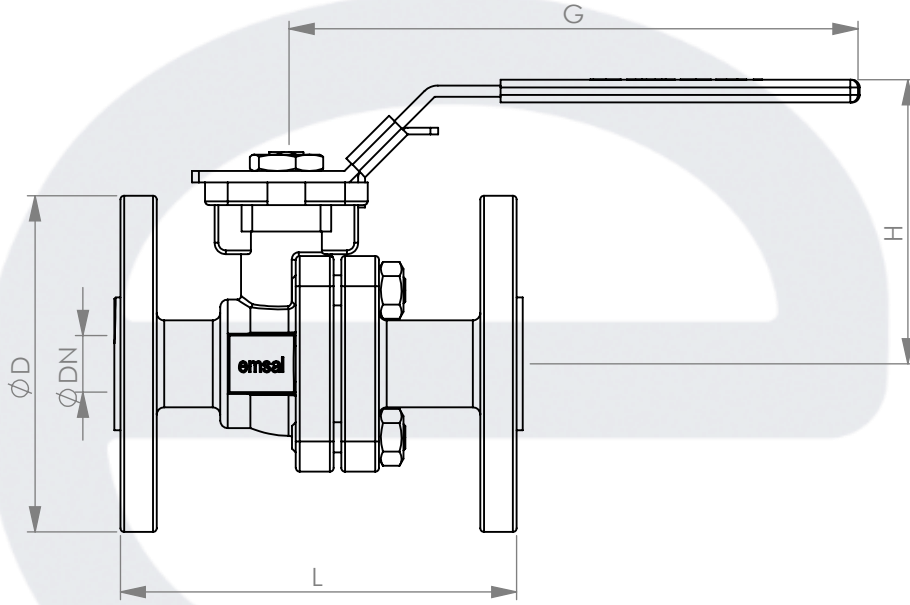

ÖLÇÜLER / DIMENSIONS

DN	15	20	25	32	40	50	65	80	100	125	150	200
D	95	105	115	140	150	165	185	200	220	250	285	340
L	115	120	125	130	140	150	170	180	190	200	210	230
G	140	140	175	180	200	200	225	265	265	335	555	700
H	93	95	115	120	140	145	160	175	190	240	260	290

Tüm ölçüler mm'dir. / All dimensions are in mm.

PARÇA LİSTESİ / PART LIST

PARÇA AÇILAMASI PART DESCRIPTION	MATERYAL MATERIAL	PARÇA AÇILAMASI PART DESCRIPTION	MATERYAL MATERIAL
GÖVDE / BODY	AISI316-304/RG5/ G-CuSn10/GGG40.3	MİL CONTASI/WASHER	P.T.F.E. / P.T.F.E. C25
KAPAK / CAP	AISI316-304/RG5/ G-CuSn10/GGG40.3	CİVATA / BOLT	AISI304
KÜRE / BALL	AISI316-304/RG5	KOL / LAVER	AISI304
CONTA / SEAT	P.T.F.E. / P.T.F.E. C25	KİLİT / LOCK	AISI304
MİL / STEM	AISI316-304	SOMUN / NUT	AISI304