



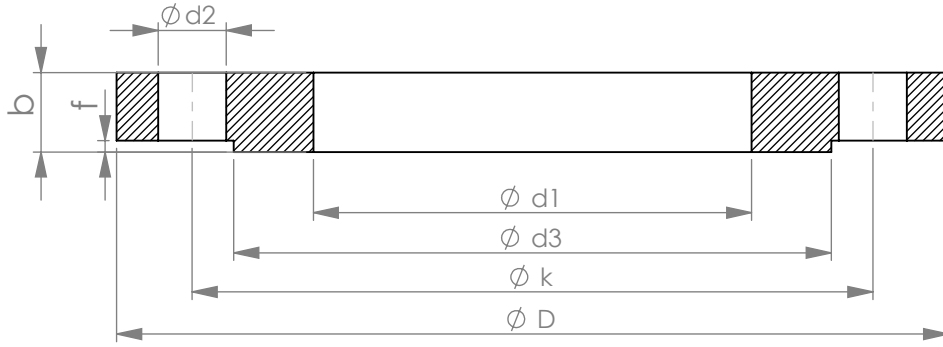

DIN DIN 2573

Ebat / Size	Boru Çapı Pipe Dia .	Flanş Ölçüleri / Flange Dimensions						Cıvata Ölçüsü / Bolt Dimensions			Ağırlık / Weight kg/ad kg/pcs
		d1	D	k	b	d3	f	d2	Cıvata Çap Bolt Dia	n	
DN15	21,3	22	80	55	12	40	2	11	M10	4	0,35
DN20	26,9	27,6	90	65	14	50	2	11	M10	4	0,53
DN25	33,7	34,4	100	75	14	60	2	11	M10	4	0,65
DN32	42,4	43,1	120	90	16	70	2	14	M12	4	1,05
DN40	48,3	49	130	100	16	80	3	14	M12	4	1,17
DN50	60,3	61,1	140	110	16	90	3	14	M12	4	1,29
DN65	76,1	77,1	160	130	16	110	3	14	M12	4	1,63
DN80	88,9	90,3	190	150	18	128	3	18	M16	4	2,62
DN100	114,3	115,9	210	170	18	148	3	18	M16	4	2,88
DN125	139,7	141,6	240	200	20	178	3	18	M16	8	3,88
DN150	168,3	170,5	265	225	20	202	3	18	M16	8	4,26
DN200	219,1	221,5	320	280	22	258	3	18	M16	8	6,27
DN250	273	276,2	375	335	24	312	3	18	M16	12	8,22
DN300	323,9	327,6	440	395	24	365	4	22	M20	12	10,6
DN350	355,6	359,7	490	445	26	415	4	22	M20	12	15,3
DN400	406,4	411	540	495	28	465	4	22	M20	16	18,2
DN450	457	462,3	595	550	30	520	4	22	M20	16	22,7
DN500	508	513,6	645	600	30	570	4	22	M20	20	24,4

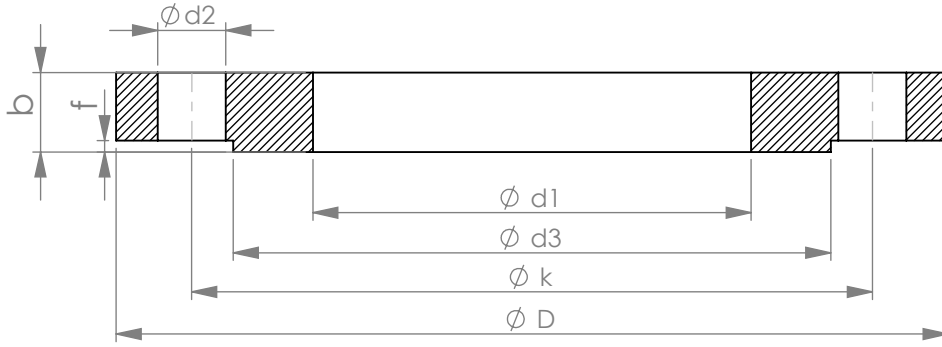

DIN DIN 2576

Ebat / Size	Boru Çapı Pipe Dia .	Flanş Ölçüleri / Flange Dimensions						Cıvata Ölçüsü / Bolt Dimensions			Ağırlık / Weight kg/ad kg/pcs
		d1	D	k	b	d3	f	d2	Cıvata Çap Bolt Dia	n	
DN15	21,3	22	95	65	14	45	2	14	M12	4	0,59
DN20	26,9	27,5	105	75	16	58	2	14	M12	4	0,85
DN25	33,7	34,5	115	85	16	68	2	14	M12	4	1,01
DN32	42,4	43,5	140	100	16	78	2	18	M16	4	1,47
DN40	48,3	49,5	150	110	16	88	3	18	M16	4	1,6
DN50	60,3	61,5	165	125	18	102	3	18	M16	4	2,17
DN65	76,1	77,5	185	145	18	122	3	18	M16	4	2,66
DN80	88,9	90,5	200	160	20	138	3	18	M16	8	3,27
DN100	114,3	116	220	180	20	158	3	18	M16	8	3,61
DN125	139,7	141,5	250	210	22	188	3	18	M16	8	4,96
DN150	168,3	170,5	285	240	22	212	3	22	M20	8	5,95
DN200	219,1	221,5	340	295	24	268	3	22	M20	8	8,54
DN250	273	276,5	395	350	26	320	3	22	M20	12	11
DN300	323,9	327,5	445	400	26	370	4	22	M20	12	12,3
DN350	355,6	359,5	505	460	28	430	4	22	M20	16	18,9
DN400	406,4	411	565	515	32	482	4	26	M24	16	25,7
DN450	457	462	615	565	38	532	4	26	M24	20	33,5
DN500	508	513,5	670	620	38	585	4	26	M24	20	38